
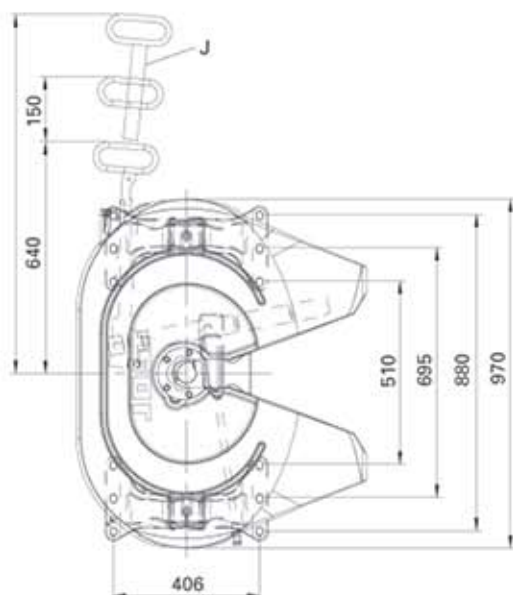


JSK 37 E

with wear ring & external jaw lubrication

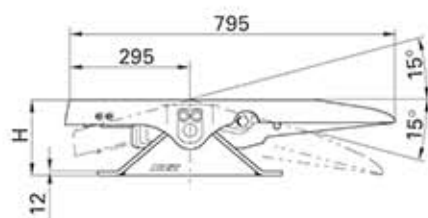

Applications: Highway Work Tipper Work

Lock jaw and wear ring can be replaced without difficulty in a few minutes with the fifth wheel still in position.

Available with extended operating handle (240mm) on demand.

Mounting must be carried out in accordance with our instructions.

Mounting hole pattern in accordance with DIN standard 74081 and ISO standard 3842. Suitable for all types of rear axle steering systems.

Type	Overall height mm	Imposed Load on tractor kg	D-value kN	Weight approx. kg	Pedestal Style	CRN
JSK37 E130 FX	130	20000	190	121.50	Weld on	36821
JSK37 E150 FX	150	20000	190	123.50	Weld on	
JSK37 E170 FX	170	20000	190	128.50	Weld on	
JSK37 E185 FX	185	20000	190	128.50	Weld on	
JSK37 E195 FX	195	20000	190	130	Weld on	
JSK37 E205 FX	205	20000	190	131.50	Weld on	
JSK37 E215 FX	215	20000	190	132	Weld on	
JSK37 E235 FX	235	20000	190	133.50	Weld on	
JSK37 E255 FX	255	20000	190	136.50	Weld on	

The right to alter specifications is reserved.